



S67 | Sliding Door System



Introducing the S67 Inline sliding door, a modern, versatile solution that seamlessly blends high performance with contemporary design. Engineered to meet the highest UK standards, this aluminium sliding door system offers reliability and flexibility for a wide range of renovation projects and new build. The S67 achieves 1.4 W/m²K U-value with double glazing.

Compatible with a multi-point lock and equipped with a low threshold, the S67 sliding door ensures security and comfort of use on all occasions.

DESIGN FEATURES

- Mitre cut frame
- Standard and reinforced interlock available
- Glazing Gaskets available in Black
- Low Threshold 22mm
- Maximum weight per leaf of 200kg

OPTIONS


- Glazing sizing range of 24mm - 32mm
- Multipoint lock
- Single or dual colour with texture or anodised finishes
- 2 to 6 sash configurations available
- Double and Triple track options available

SPECIFICATIONS


PERFORMANCE & ACCREDITATIONS	S67
U-value (Double Glazing) (Ug = 1.0 W/m²K)	1.4 W/m²K
Air Permeability	Class A4 (600Pa)
Water Tightness	Class 9A (600Pa)
Wind Resistance	Class B3 (1200Pa)
Acoustic	30-40 dB
SYSTEM	
Depth	67 mm
CONFIGURATIONS	
Double Track	✓
Triple Track	✓
SIZE AND WEIGHT LIMITS	
Max Leaf Height	2700 mm
Max Leaf Width	3000 mm
Max Vent Weight	200 kg
GLAZING	
Glazing Thickness	24 - 32 mm
SYSTEM FEATURES	
Single Colour	✓
Dual Colour	✓
Textured Finish	✓
Anodised Finish	✓
Multi-Point Locking	✓
Sightline Interlock	35mm
Sightline Cill	107.1mm
Sightline Head	107.1mm
Sightline Jamb	112.6mm

CONFIGURATIONS

DOUBLE TRACK



TRIPLE TRACK




KEY




THERMAL PROFILE

S67 THERMAL PROFILE

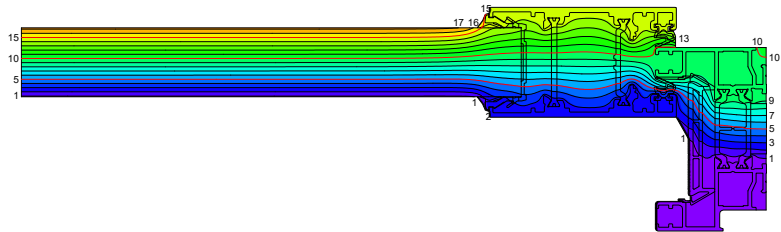


CAD CROSS SECTIONS


Additional details are available on request.

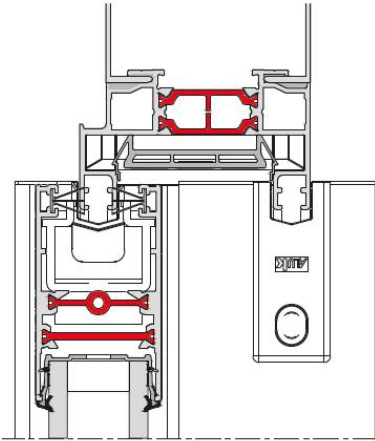

S67 DOUBLE TRACK HEAD

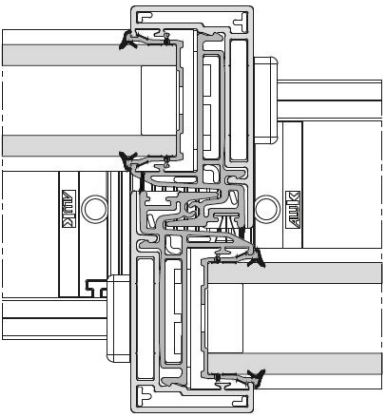

S67 DOUBLE TRACK / TIPLE TRACK INTERLOCK

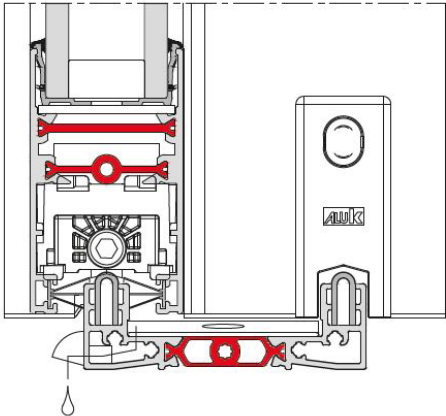

S67 DOUBLE TRACK LOW THRESHOLD